



P70SCC

MORE POWER AND LARGE OPENING

Largest table top machine with more power and wider opening to crimp the heavy duty fittings.

P70SCC is ideal machine also for small to mid range industrial hoses.

TECHNICAL DATA

Max crimping dia (mm/inch) ¹⁾	124/4.88
Max crimping force (kN)	4000
Max crimping force (tonnage)	400
Cycle time 10 mm ²⁾	6.8
Hydraulic hose size (inch)	3 *
Industrial hose size (inch)	4.88 *
Die set series	32/140
Max opening (mm) ³⁾	+60
Max opening without dies (mm)	200
Master die D/L (mm)	140/125
Master die D/L (inch)	5.52-4.92
Motor Power (kW/HP)	5.5/7.5
Oil tank volume	80 l

DIMENSIONS (LxWxH)

(mm)	912x559x907
(inch)	35.9x22x35.7


WEIGHT (KG/LBS)

461/1014

* ACCORDING TO THE FITTING.



Foot pedal as an option.

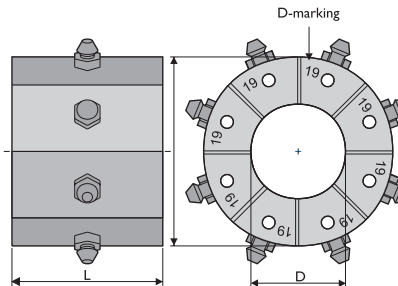

- 1) With standard dies. Crimping range can be increased with special dies.
- 2) Theoretical with 10 mm cycle.
- 3) Maximum opening is the total die travel. Add this value to the minimum crimping diameter of the die set used. The result is the maximum opening of the machine with die set in place.

CONTROL

SCC (5" touchscreen)

STANDARD FEATURES

Adapter dies (part no 402604)

OPTIONS

- Foot pedal (part no 691563)
- Mirror
- Electric backstop
- Mechanical back stop device
- Tool base with QuickChange-tool
- Tool rack with QuickChange-tool (part no 692740)
- QuickChange-tool (part no 701049)



DIE SET 140-SERIES

DieSetNo	D (mm)	L (mm)	Crimp. range (mm)
18860/84	84	110	84.0-92.0
18860/92	92	110	92.0-100.0
18860/100	100	110	100.0-108.0
18860/108	108	110	108.0-116.0
18860/116	116	110	116.0-124.0

DIE SET 32-SERIES

DieSetNo	D (mm)	L (mm)	Crimp. range (mm)
18506/10	10	55	10.0-12.0
18506/12	12	55	12.0-14.0
18506/14	14	55	14.0-16.0
18506/16	16	55	16.0-19.0
18506/19	19	55	19.0-22.0
18506/22	22	70	22.0-26.0
18506/26	26	70	26.0-30.0
18506/30	30	70	30.0-34.0
18506/34	34	75	34.0-39.0
18506/39	39	75	39.0-45.0
18506/45	45	90	45.0-51.0
18506/51	51	90	51.0-57.0
18506/57	57	100	57.0-63.0
18506/63	63	110	63.0-69.0
18506/69	69	110	69.0-75.0
18506/74	74	110	74.0-80.0
18506/78	78	110	78.0-87.0

In addition to the standard die sets, a wide range of special die sets is available on request.