

PH347 - SUPER HIGH PRESSURE PAINT SPRAY

Polyhose Proprietary Product


Construction

Core Polyamide

Reinforcement One or more Braids of Aramid fiber with single braid of steel wire

Cover Polyurethane, Blue Colour

Application Very high pressure Airless paint spray systems for 300 to 700 bar. Suitable for applications requiring chemical resistance to solvents and aggressive fluids

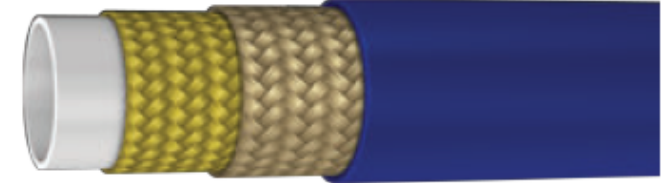

Note: Special colours available on request

Item Code	Dash Size	DN	ID		OD		WP		BP		BR/r		W
			inch	mm	inch	mm	psi	bar	psi	bar	inch	mm	g/m
PH347-04	-04	06	1/4	6.4	0.540	13.7	10,000	700	40,000	2,800	2.8	70	240
PH347-06	-06	10	3/8	9.5	0.740	18.8	10,000	700	40,000	2,800	4.0	100	381
PH347-08	-08	12	1/2	12.7	0.880	22.4	7,500	520	30,000	2,080	7.1	180	510
PH347-12	-12	20	3/4	19.0	1.150	29.2	5,000	345	20,000	1,380	7.5	191	760
PH347-16	-16	25	1	25.4	1.440	36.6	4,350	300	17,400	1,200	10.0	254	1405



Temperature Range: Continuous: -40°C to +100°C Temp. not to exceed +70°C for Air and Water based fluids

+90 216 5278751

+90 532 1606148

www.ormanlar.com.tr



MERKEZ

Istanbul Anadolu Yakası İMES Sanayi Sitesi A Blok 103 Sk.
No:4 34775 Y.Dudullu - Ümraniye / İstanbul , TÜRKİYE