

Two piece fittings - Universal series for wire braided and 4 spiral hydraulic hoses


FO13B FO12B

BSP O-ring female swivel 60° cone

NO SKIVE / EXTERNAL SKIVE

ISO 8434-6 / BS 5200

BSP Oringli düz dişi başlık

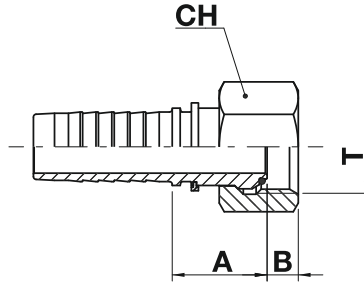

code	ø hose			T	A		B		CH		
	dn	inch	size		mm	in	mm	in	mm	in	↗ in
FO13B-04-04	6	1/4	04	1/4-19	17,5	0,69	4,2	0,17	19,0	0,748	3/4
FO13B-04-06	6	1/4	04	3/8-19	19,0	0,75	6,1	0,24	22,0	0,866	7/8
FO13B-06-06	10	3/8	06	3/8-19	19,0	0,75	6,1	0,24	22,0	0,866	7/8
FO13B-08-08	12	1/2	08	1/2-14	21,0	0,83	6,5	0,26	27,0	1,063	1.1/16
FO12B-10-10	16	5/8	10	5/8-14	21,5	0,85	9,5	0,37	30,0	1,181	1.3/16
FO12B-12-12	19	3/4	12	3/4-14	24,0	0,94	8,7	0,34	32,0	1,260	1.1/4
FO12B-12-16	19	3/4	12	1-11	27,0	1,06	10,5	0,41	38,0	1,496	1.1/2
FO12B-16-16	25	1	16	1-11	28,5	1,12	10,5	0,41	38,0	1,496	1.1/2
FO12B-16-20	25	1	16	1.1/4-11	36,0	1,42	10,0	0,39	50,0	1,969	2
FO12B-20-20	31	1.1/4	20	1.1/4-11	35,0	1,38	10,0	0,39	50,0	1,969	2
FO12B-20-24	31	1.1/4	20	1.1/2-11	37,8	1,49	12,0	0,47	55,0	2,165	2.3/16
FO12B-24-24	38	1.1/2	24	1.1/2-11	35,8	1,41	12,0	0,47	55,0	2,165	2.3/16
FO12B-24-32	38	1.1/2	24	2-11	37,8	1,49	16,0	0,63	70,0	2,756	2.3/4
FO12B-32-32	51	2	32	2-11	39,8	1,57	16,0	0,63	70,0	2,756	2.3/4

Nut type

FO13

FO12

