

Interlock fittings for 4 and 6 spiral hoses


## F092I

**BSP O-ring female swivel 60° cone - 90° elbow**

INTERLOCK

ISO 8434-6 / BS 5200

**BSP interlock 90° başlık**

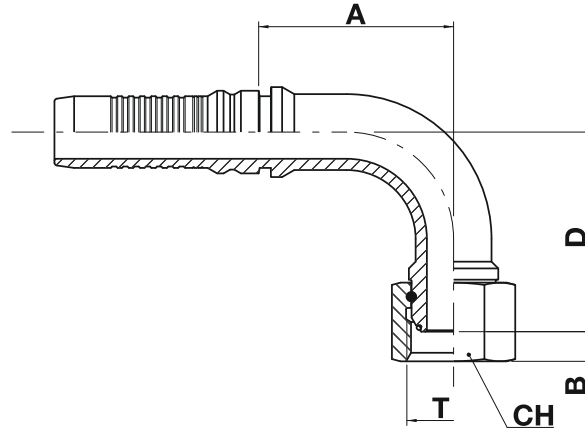

| code        | ø hose |        |      | T         | A     |      | B    |      | D     |      | CH   |       |         |
|-------------|--------|--------|------|-----------|-------|------|------|------|-------|------|------|-------|---------|
|             | dn     | inch   | size |           | mm    | in   | mm   | in   | mm    | in   | mm   | in    | ↻ in    |
| FO92I-12-12 | 19     | 3/4"   | 12   | 3/4"-14   | 53,0  | 2,09 | 9,0  | 0,35 | 57,0  | 2,24 | 32,0 | 1,260 | 1.1/4"  |
| FO92I-16-16 | 25     | 1"     | 16   | 1"-11     | 69,0  | 2,72 | 10,5 | 0,41 | 71,0  | 2,80 | 38,0 | 1,496 | 1.1/2"  |
| FO92I-20-20 | 31     | 1.1/4" | 20   | 1.1/4"-11 | 83,2  | 3,27 | 10,0 | 0,39 | 77,0  | 3,03 | 50,0 | 1,969 | 2"      |
| FO92I-20-24 | 31     | 1.1/4" | 20   | 1.1/2"-11 | 79,7  | 3,14 | 12,0 | 0,47 | 89,0  | 3,50 | 55,0 | 2,165 | 2.3/16" |
| FO92I-24-24 | 38     | 1.1/2" | 24   | 1.1/2"-11 | 99,5  | 3,92 | 12,0 | 0,47 | 100,0 | 3,94 | 55,0 | 2,165 | 2.3/16" |
| FO92I-32-32 | 51     | 2"     | 32   | 2"-11     | 127,0 | 5,00 | 16,0 | 0,63 | 128,0 | 5,04 | 70,0 | 2,756 | 2.3/4"  |