

Polyhose®


Providing Flexible Solutions Globally

PH308 - SEWER JET - 3600 / 4000 PSI

Polyhose Proprietary Product

ORMANLAR
High Tech Hose Solutions

Hose
Fittings
Assembly

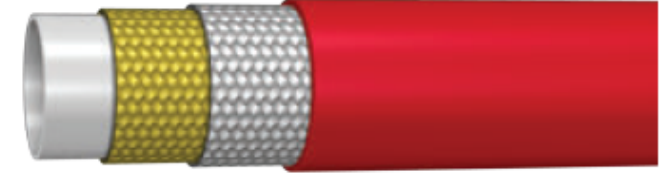

Construction

Core Special Polyurethane

Reinforcement One or more braids of Aramid Fiber and one special braid of synthetic fiber armoring

Cover Polyurethane, Red Colour

Application Extreme flexibility at low temperature owing to special inner tube material and light weight reinforcement. Bonded construction to resist kinking. Resists cuts, abrasion and microbiological degradation. Available in long lengths

Note: Special colours available on request

Item Code	Dash Size	DN	ID		OD		WP		BP		BR/r		W
			inch	mm	inch	mm	psi	bar	psi	bar	inch	mm	g/m
PH308-08	-08	12	1/2	12.7	0.810	20.6	4,000	275	16,000	1,100	3.1	80	260.0
PH308-12	-12	20	3/4	19.0	1.150	29.2	3,600	250	9,000	625	4.5	115	435.0
PH308-16	-16	25	1	25.4	1.440	36.6	3,600	250	9,000	625	5.3	135	700.0
PH308-20	-20	32	1.1/4	31.8	1.800	45.7	3,600	250	9,000	625	8.3	210	975.0



Temperature Range: Continuous: -40°C to +60°C

+90 216 5278751

+90 532 1606148

www.ormanlar.com.tr



MERKEZ

Istanbul Anadolu Yakası İMES Sanayi Sitesi A Blok 103 Sk.
No:4 34775 Y.Dudullu - Ümraniye / İstanbul , TÜRKİYE